
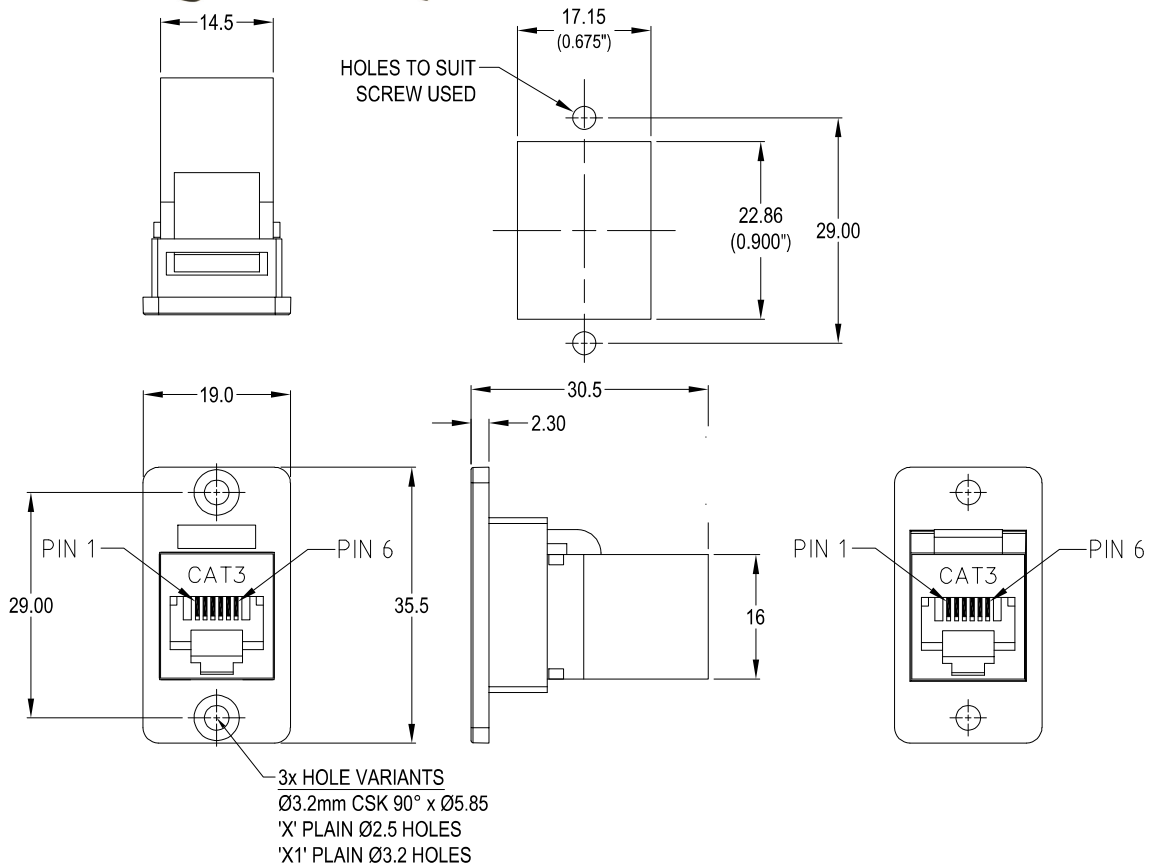


# CLIFF

## SLIM CAT3 RJ12 6P6C FRONT MOUNTING FEEDTHROUGH CONNECTOR

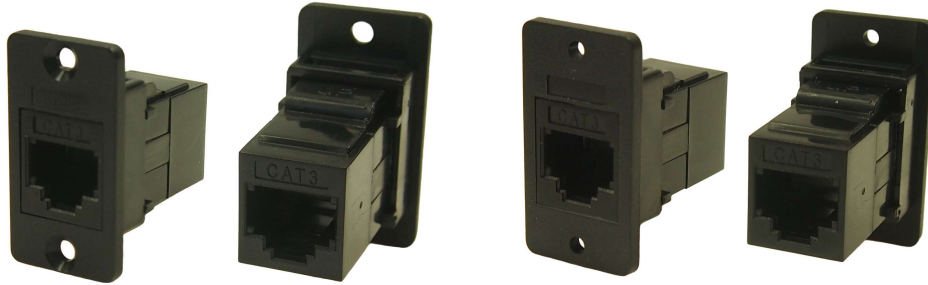

### Part No.

- CP30624** SLIM FM Cat3 RJ12 6P6C Black plastic frame, CSK holes
- CP30624X** SLIM FM Cat3 RJ12 6P6C Black plastic frame, Ø2.5 PLAIN holes
- CP30624X1** SLIM FM Cat3 RJ12 6P6C Black plastic frame, Ø3.2 PLAIN holes

### Feedthrough Features

- Fits standard rectangular cutout.
- Various hole mounting options.
- No soldering or punch termination. Use standard cable for each connector style.
- Low rear profile.

### General:

Please note: Functionality is affected by cable quality, length and cable wiring configuration.

### Material:

1. RJ12 In-Line Coupler: PC/ABS, UL94 V-0 Black
2. RJ12 In-Line Coupler Contact: Phosphor Bronze, 3-50 micro inches gold plating over nickel plate.
3. PCB: FR4, UL94 V-0
4. FT Frame: Polyamide UL 94V-2
5. Operating Temperatures: Min -10°C Max +60°C